

CL(P)-47PLC68-OB



Display size
47" Diagonal



Xtreme™ Outdoor Daylight Readable Display

47" OUTDOOR DISPLAY

There has never been an outdoor flat panel display like the Peerless-AV Xtreme™ display. Eliminating the need for vents, filters or exhaust fans, the unique fully-sealed design provides the ultimate protection against weather, water and dust. A patented Dynamic Thermal Transfer™ system keeps internal components safely warmed in extreme cold and properly cooled in extreme heat. The Peerless-AV outdoor flat panel display has the highest ratings for waterproof and dustproof in its class, making it the perfect choice for any location, indoor or out.

The CL(P)-47PLC68-OB's daylight readable display provides a clear, crisp picture even in direct sunlight.



Additional Features

- ✓ Daylight Readable Full HD 1080p resolution for bright, crisp picture
- ✓ Patented Dynamic Thermal Transfer™ system keeps internal components safely warmed in extreme cold and properly cooled in extreme heat
- ✓ Polarized models available for use in portrait specific installations
- ✓ Waterproof Xtreme Soundbar delivers highest quality sound (optional accessory)



CL-47PLC68-OB

AMBIENT LIGHT SENSOR


Automatically adjusts brightness to best match the lighting conditions

FULLY-SEALED DESIGN

Prevents water, dust or insects from entering the display

ANTI-REFLECTIVE, IMPACTRESISTANT SAFETY GLASS

Protects the screen against damage



Patented Dynamic Thermal Transfer™ system keeps internal components safely warmed in extreme cold and properly cooled in extreme heat

Portrait model,
CLP-47PLC68-OB

FC CE

info@peerless-av.com
peerless-av.com

peerless-AV®

CL-47PLC68-OB	Xtreme™ Outdoor Daylight Readable Display - 47" Landscape Outdoor Display
CLP-47PLC68-OB	Xtreme™ Outdoor Daylight Readable Display - 47" Portrait Outdoor Display

LCD Display

SCREEN SIZE	47" diagonal
ASPECT RATIO	16:9
RESOLUTION	1920 X 1080
BRIGHTNESS	700CD/M2
BACKLIGHT ADJUSTMENT	Automatic (Ambient Light Sensor)
CONTRAST RATIO	1000:1
VIEWING ANGLE	178° Vertical/Horizontal
RESPONSE TIME	9 ms (Gray to Gray)
REFRESH RATE	120Hz

Environmental

OPERATING TEMPERATURE	-40°F to 140°F
RAGE TEMPERATURE	-40°F to 140°F (Unit Left Plugged In)
IP RATING	IP68
SAFETY/EMC	FCC Class B

Mechanical

SIZE (W x H x D)	43.58" x 25.67" x 5.63" (1107 x 652 x 143mm)
COLOR	Black

TV Controller Features

ANALOG TV	NTSC
DIGITAL TV	ATSC
PICTURE ADJUSTMENT	Brightness/Contrast/Saturation/Tint/ Sharpness/Noise reduction
PICTURE MODE	Standard, Dynamic, Personal, Soft
COLOR TEMPERATURE ADJUSTMENT	Cool, Normal, Warm
SCREEN ADJUSTMENT	Normal/Wide/Zoom
CLOCK, SLEEP TIMER	Yes
V-CHIP	Yes
CLOCK, SLEEP TIMER	Yes
V-CHIP	Yes
CLOCK, SLEEP TIMER	Yes
V-CHIP	Yes


GLASS	Anti-reflective & UV Protection
VESA® PATTERN	600 x 400mm
NET WEIGHT	110lb

Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
CL(P)-47PLC68-OB	49.25" x 30.00" x 10.75" (1251 x 762 x 273mm)	128lb (58.2kg)	CL-47PLC68-OB: 815635010337 CLP-47PLC68-OB: 735029301356	Display, Remote Control, User's Manual, Fuse Holder Bracket, Nut Drivers, Power Cord	1

Accessories

EPT650-(S):	Outdoor Universal Tilt Wall Mount
ESA763C:	Outdoor Articulating Wall Mount

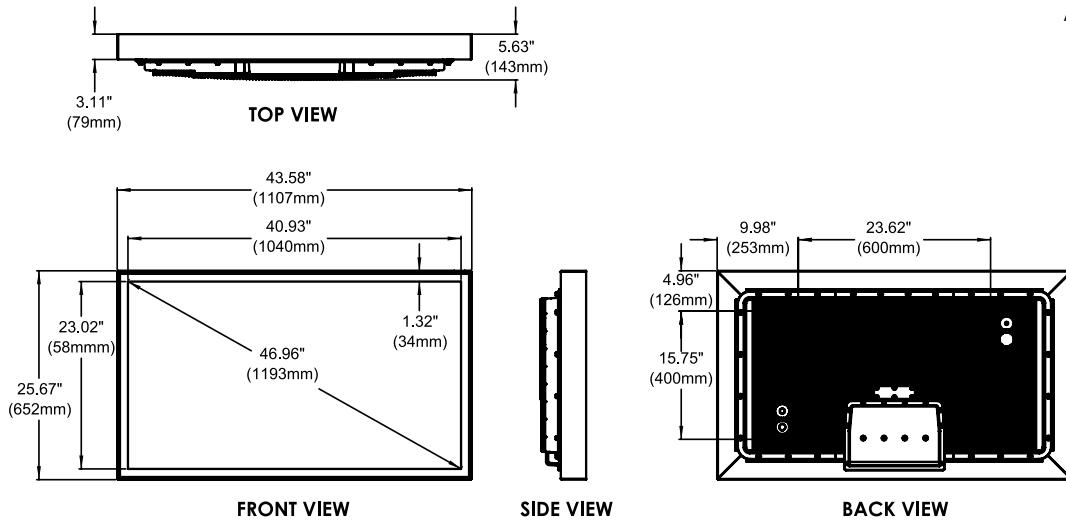**Architect Specifications**

The Xtreme™ Outdoor Daylight Readable Display shall be a Peerless-AV model CL(P)-47PLC68-OB and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

peerless-av®