

CL-5565



Display size
55" Diagonal

UV2™ Outdoor TV

55" OUTDOOR TV


There has never been an outdoor TV like the Peerless-AV® UV2™. An all-season solution for outdoor entertainment and living, the UV2 is weatherproof and maintenance free, making the outdoors a reliable location for digital entertainment. Homeowners as well as restaurant and bar owners can now have the quality outdoor TV experience they've been looking for. With the highest operating ratings in its class, the UV2 is the perfect choice for any outdoor environment.

Peerless-AV's Outdoor TVs are an all-season solution, providing the ultimate outdoor viewing experience.



Additional Features

- ✓ Integrated thermal management system allows an operating range of -24°F to 124°F
- ✓ Construction materials provide the ultimate defense against weather, discoloration and impact
- ✓ Waterproof external speakers provide excellent sound

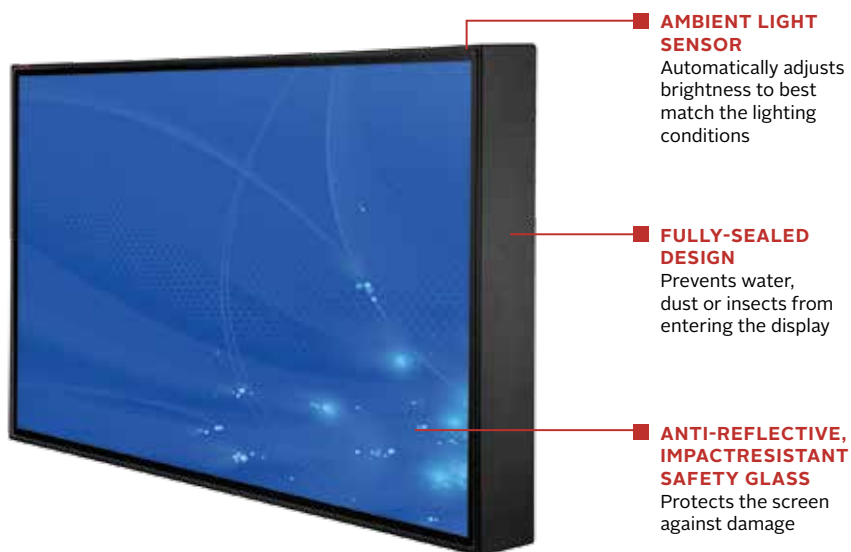

Waterproof external speakers provide excellent sound

CL-5565 55" UV2™ Outdoor TV

LCD Display

SCREEN SIZE	55" diagonal
ASPECT RATIO	16:9
RESOLUTION	1920 X 1080
BRIGHTNESS	700cd/m²
CONTRAST RATIO	1000:1
VIEWING ANGLE	178° Vertical/Horizontal
RESPONSE TIME	9 ms (Gray to Gray)
REFRESH RATE	120 hz

Environmental

OPERATING TEMPERATURE	-24°F to 124°F
STORAGE TEMPERATURE	-40°F to 140°F
RATINGS	IP65 AND NEMA 4X
SAFETY/EMC	FCC Class B

Mechanical

SIZE (W x H x D)	50.39" X 29.56" X 5.85" (1280 X 751 X 149mm)
COLOR	Black

TV Controller Features

ANALOG TV	NTSC
DIGITAL TV	ATSC
PICTURE ADJUSTMENT	Brightness/Contrast/Saturation/ Tint/ Sharpness/Noise reduction
PICTURE MODE	Standard, Dynamic, Personal, Soft
COLOR TEMPERATURE ADJUSTMENT	Cool, Normal, Warm
SCREEN ADJUSTMENT	Normal/Wide/Zoom
CLOCK, SLEEP TIMER	Yes
MTS	Yes
V-CHIP	Yes
CLOSED CAPTION	Yes
ELECTRONIC PROGRAM GUIDE	Yes
NOISE REDUCTION	Yes

Input/Output Connections

TV INPUT	Coax, 75 ohm (x1)
VGA INPUT	15 pin D-SUB (x1)
HDMI INPUT	HDMI (x3), 480i, 480p, 720p, 1080i, 1080p
S-VIDEO INPUT	Mini DIN (x1)
CVBS INPUT	RCA (x1)
YPBPR INPUT	RCA (x1), 480i, 480p, 720p, 1080i, 1080p
STEREO AUDIO INPUT	3.5 mm (x1)
STEREO AUDIO INPUT	RCA (x1)
AUDIO OUTPUT	3.5 mm (x1)
SPEAKERS	Included, 10W x 2 at 8Ω
USB	Yes
RS232	DB-9 (Male)

Power

AC INPUT	90 VAC to 240 VAC, 47 to 63 HZ
POWER CONSUMPTION	Display – 122 W (Nominal)


Package Specifications

	PACKAGE SIZE (W x H x D)	PACKAGE SHIP WEIGHT	PACKAGE UPC CODE	PACKAGE CONTENTS	UNITS IN PACKAGE
CL-5565	56" x 34" x 11" (1423 x 864 x 280mm)	133lb (60.5kg)	735029304234	Display, Waterproof Remote Control, User's Manual	1


Accessories

EPT650(-S):	Outdoor Universal Tilt Wall Mount
ESA763PU:	Outdoor Articulating Wall Mount
CLCOV-LG-GR:	TV Cover - Large

All dimensions = inch (mm)




TOP VIEW

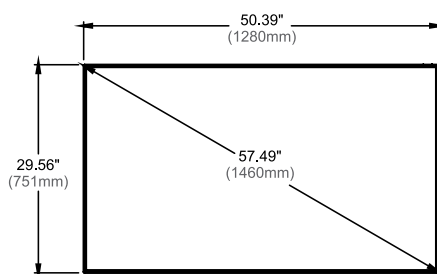

FRONT VIEW



SIDE VIEW

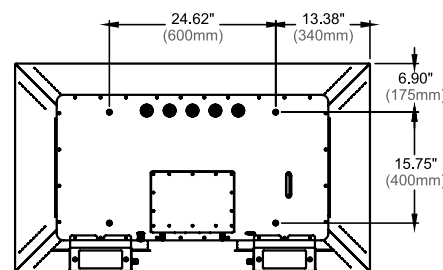

BACK VIEW

Architect Specifications

The 55" UV2 Outdoor Display shall be a Peerless-AV model CL-5565 and shall be located where indicated on the plans. Assembly and installation shall be done according to instructions provided by the manufacturer.

Visit peerless-av.com to see the complete line of AV solutions from Peerless-AV, including outdoor displays, wireless, kiosks, digital audio, display mounts, projector mounts, carts/stands, and a full assortment of accessories.

Peerless-AV
2300 White Oak Circle
Aurora, IL 60502 USA
(800) 865-2112
(630) 375-5100
Fax: (800) 359-6500

Peerless-AV Europe
Unit 3 Watford Interchange
Colonial Way, Watford
Herts, WD24 4WP
United Kingdom
+44 (0) 1923 200100
Fax: +44 (0) 1923 200101

Peerless-AV de México
Ave de las Industrias 413
Parque Industrial Escobedo
Escobedo, N.L.,
Mexico 66050
+52 (81) 8384-8300
Fax: +52 (81) 8384-8360

peerless-AV®